PROJECT 1
HEB-MVR SPATIAL UX DESIGN

Yichen Tong · Nicolas Xu
Design + Environmental Analysis
Cornell University
DEA 3301 | Fall 2026

DRAWING INDEX

SHEET	DRAWING TITLE	SCALE
G100	Cover Sheet + Drawing Index	NTS
A001	Baseline Level 1 Floor Plan	1/8" = 1'-0"
A002	Baseline Level 2 Floor Plan	1/8" = 1'-0"
A101	Level 1 Floor Plan	1/8" = 1'-0"
A102	Level 2 Floor Plan	1/8" = 1'-0"
A111	Level 1 RCP	1/8" = 1'-0"
A112	Level 2 RCP	1/8" = 1'-0"
A201	Interior Elevation 1	1/8" = 1'-0"
A202	Interior Elevation 2	1/8" = 1'-0"
A301	Building Section -- East	1/8" = 1'-0"
A302	Building Section -- South	1/8" = 1'-0"
A401	Enlarged Plan + Interior Elevation	1/4" = 1'-0"
A601	FF&E Schedule 1	NTS
A601	FF&E Schedule 2	NTS
A602	Material & Finish Schedule 1	NTS
A602	Material & Finish Schedule 2	NTS
A901	Perspective Rendering	NTS

SHEET CONVENTIONS
Sheet size: 17 x 11 inches / landscape. Drawing scales apply at 100% print size.

HEB-MVR SPATIAL UX DESIGN

CORNELL UNIVERSITY

DEA3301 / FALL 2026

No.	Description	Date

Cover Sheet + Drawing Index

Project number	DEA3301-P1	G100
Date	30 SEP 2026	
Drawn by	NX/YT	
Checked by	Checker	Scale

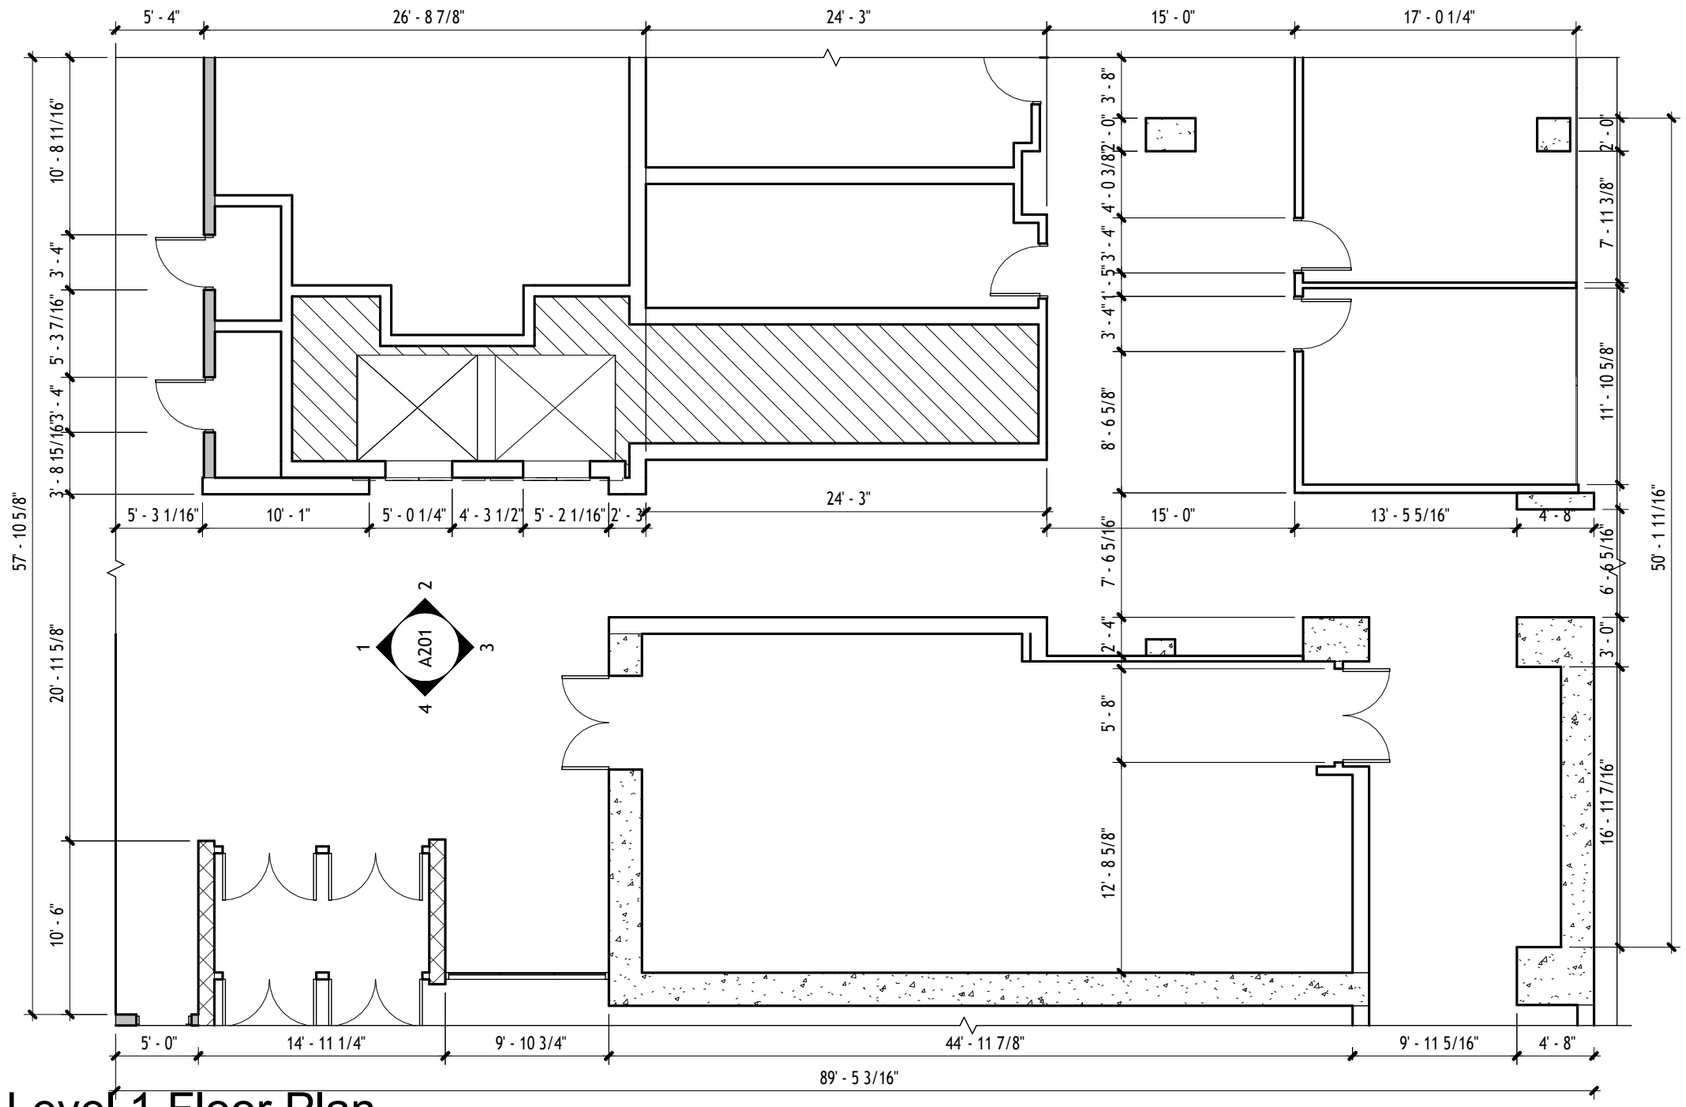

1 Level 1 Floor Plan

1/8" = 1'-0"

HEB-MVR SPATIAL UX DESIGN

CORNELL UNIVERSITY

DEA3301 / FALL 2026

No.	Description	Date

Baseline Level 1 Floor Plan

Project number	DEA3301-P1	A001
Date	30 SEP 2026	
Drawn by	NX/YT	
Checked by	Checker	Scale: 1/8" = 1'-0"

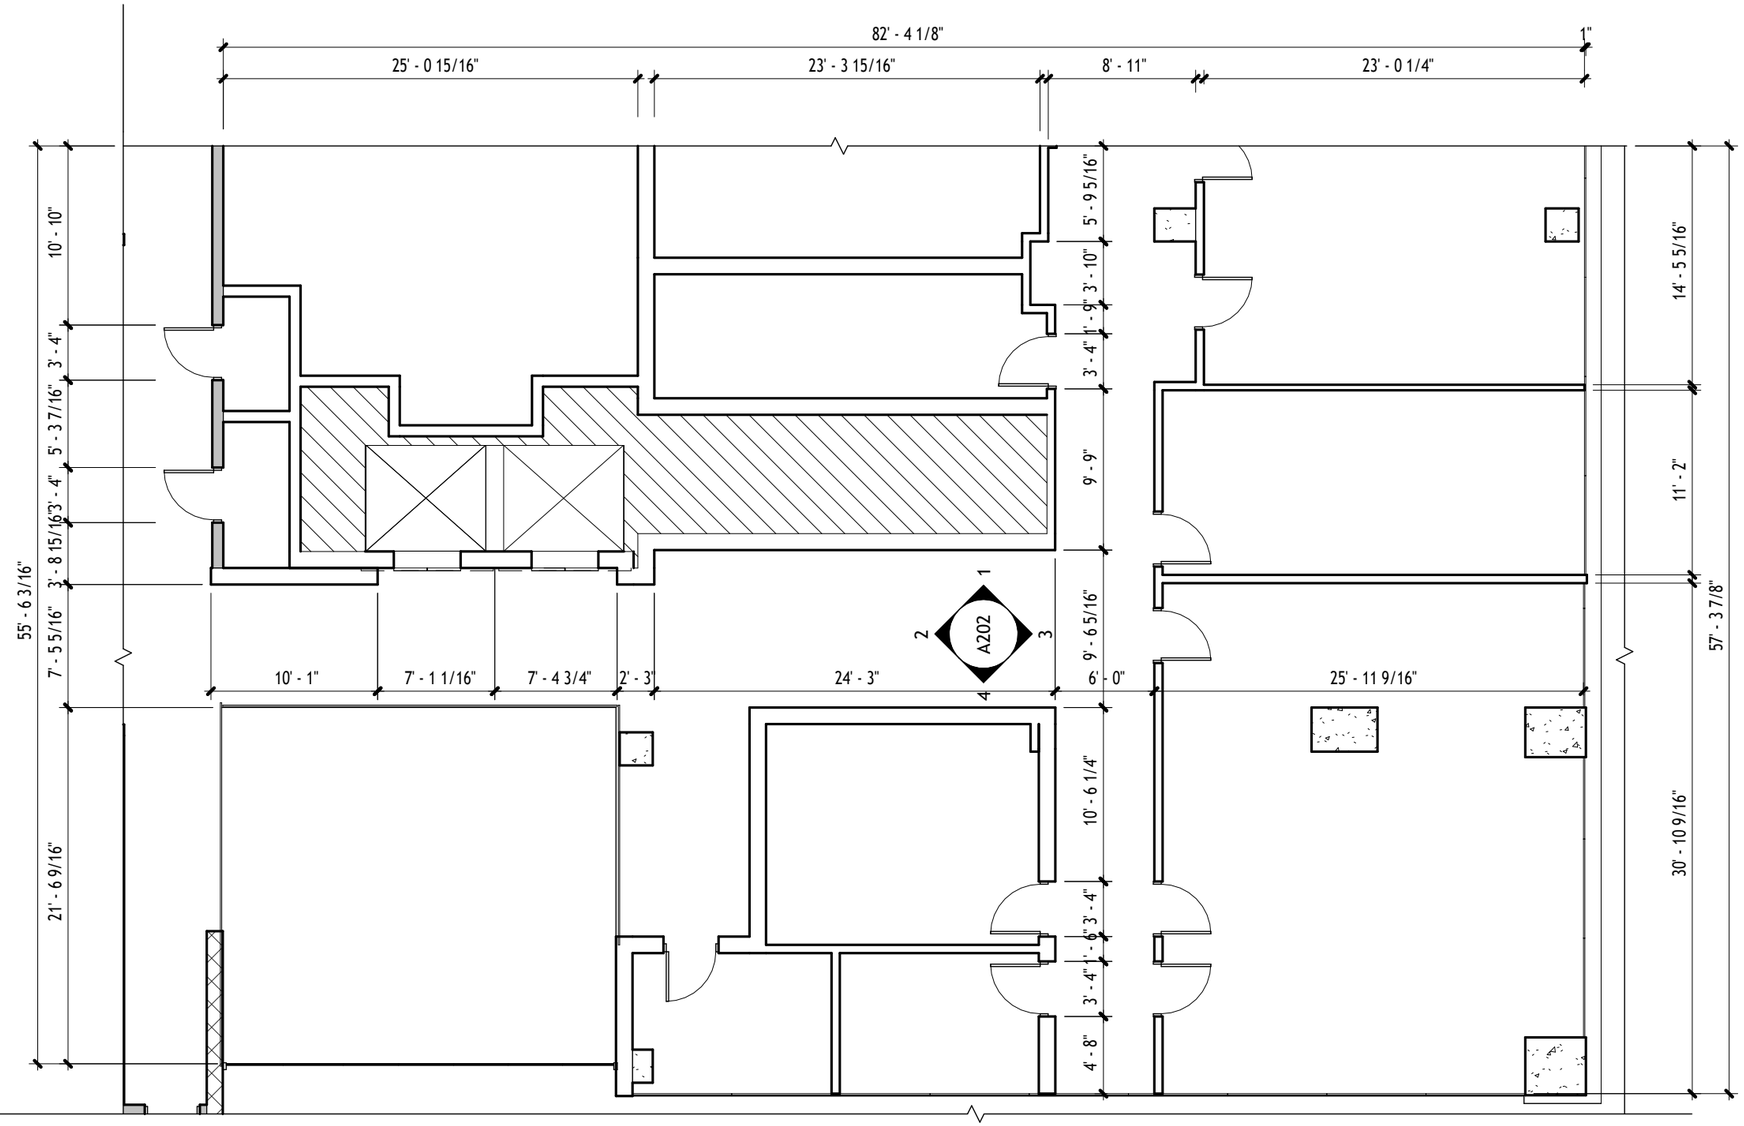

Level 2 Floor Plan

1

1/8" = 1'-0"

HEB-MVR SPATIAL UX DESIGN

CORNELL UNIVERSITY

DEA3301 / FALL 2026

No.	Description	Date

Baseline Level 2 Floor Plan

Project number	DEA3301-P1
Date	30 SEP 2026
Drawn by	NX/YT
Checked by	Checker

A002

Scale: 1/8" = 1'-0"

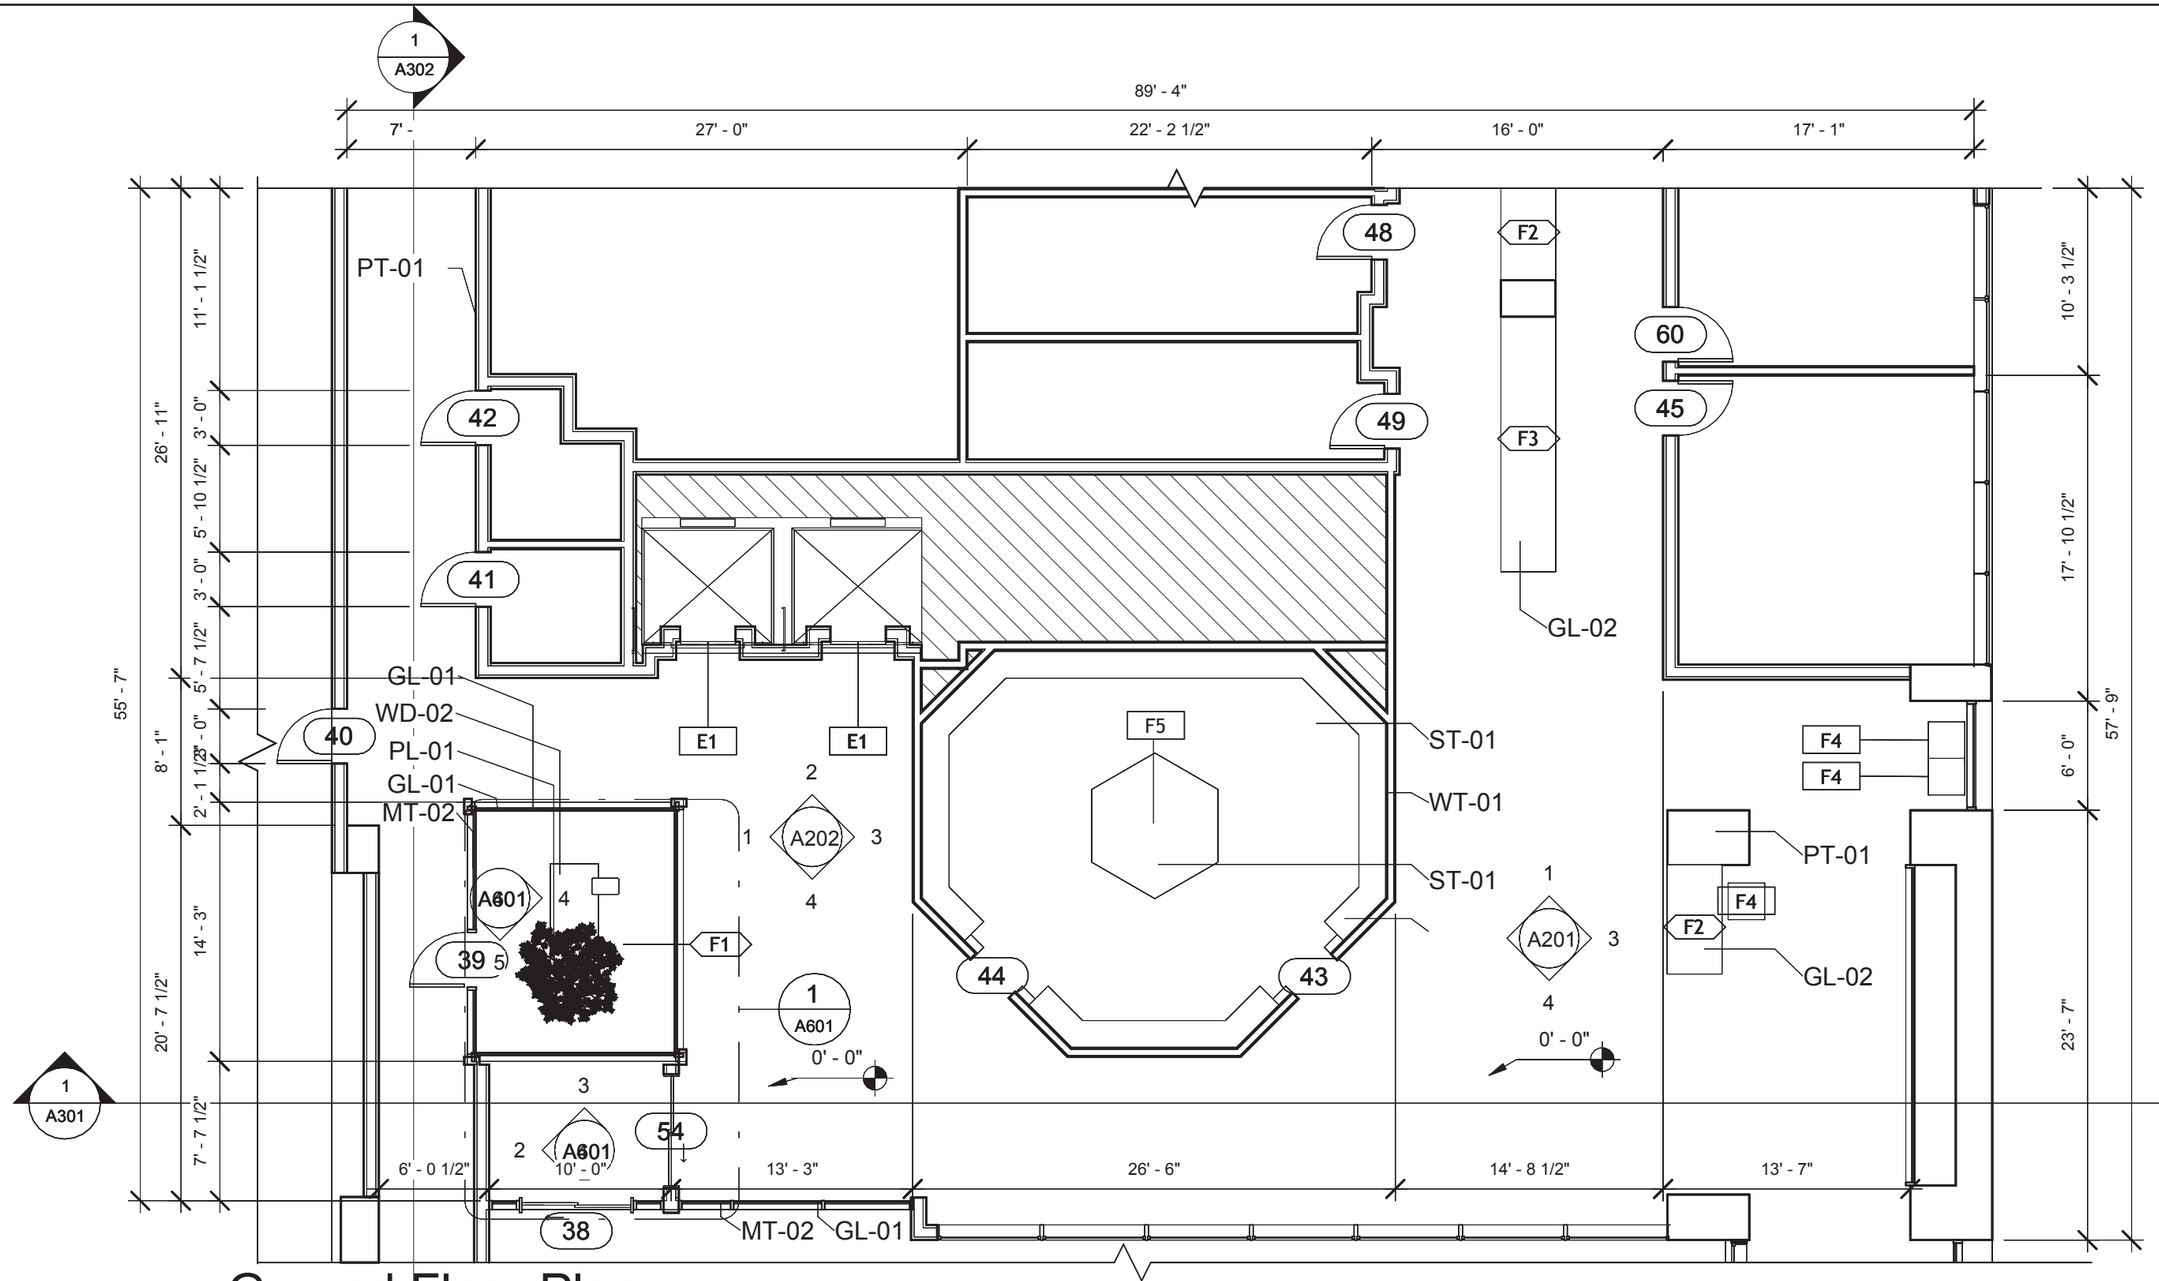

Ground Floor Plan

1 — 1/8" = 1'-0"

50

HEB-MVR SPATIAL UX DESIGN

CORNELL UNIVERSITY

DEA3301 / FALL 2026

No.	Description	Date

Level 1 Floor plan

Project number	DEA3301-P1	A101
Date	30 SEP 2026	
Drawn by	NX /YT	
Checked by	Checker	Scale 1/8" = 1'-0"

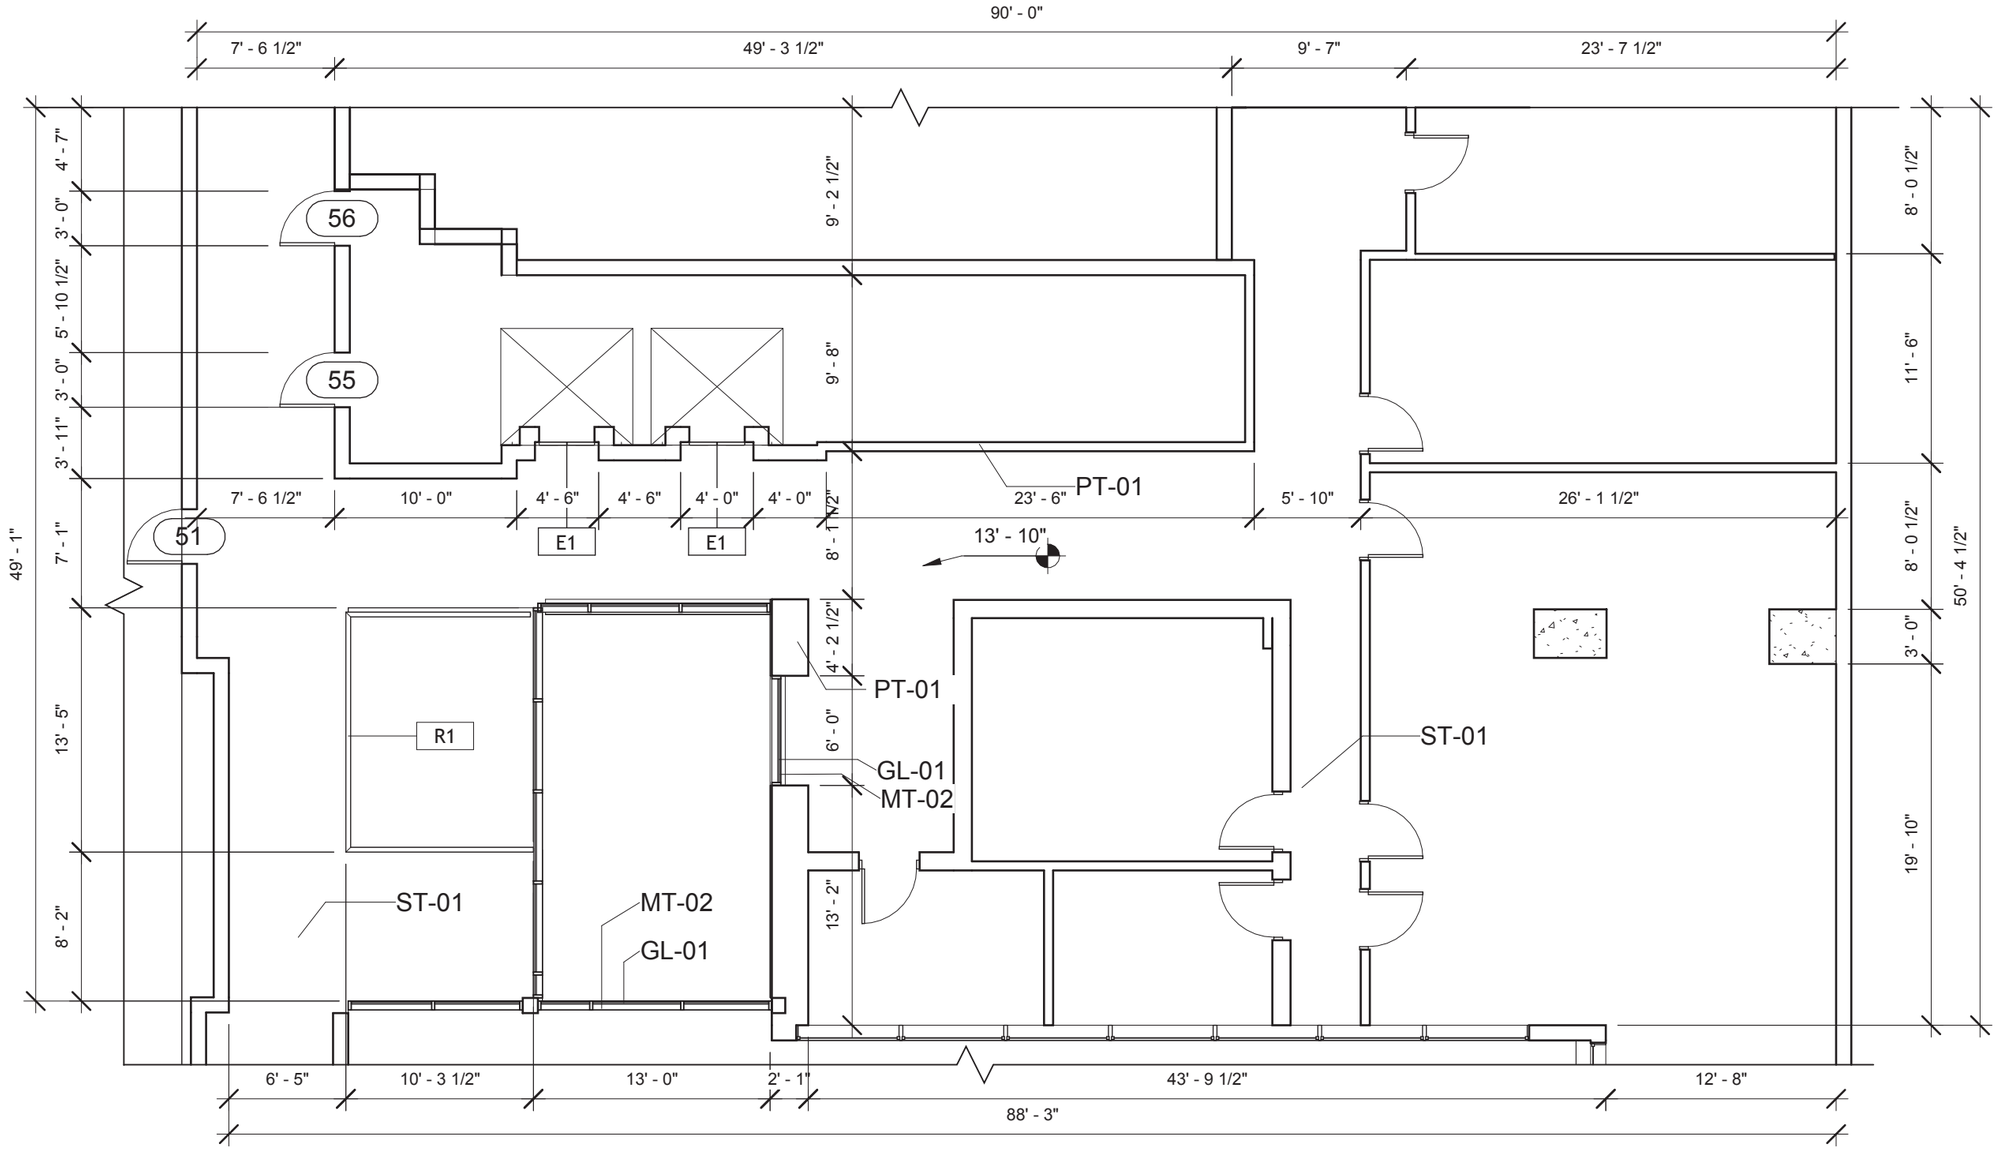

1 Level 2 Floor Plan

1/8" = 1'-0"

HEB-MVR SPATIAL UX DESIGN

CORNELL UNIVERSITY

DEA3301 / FALL 2026

No.	Description	Date

Level 2 Floor Plan

Project number	DEA3301-P1	A102
Date	30 SEP 2026	
Drawn by	NX/YT	
Checked by	Checker	Scale 1/8" = 1'-0"

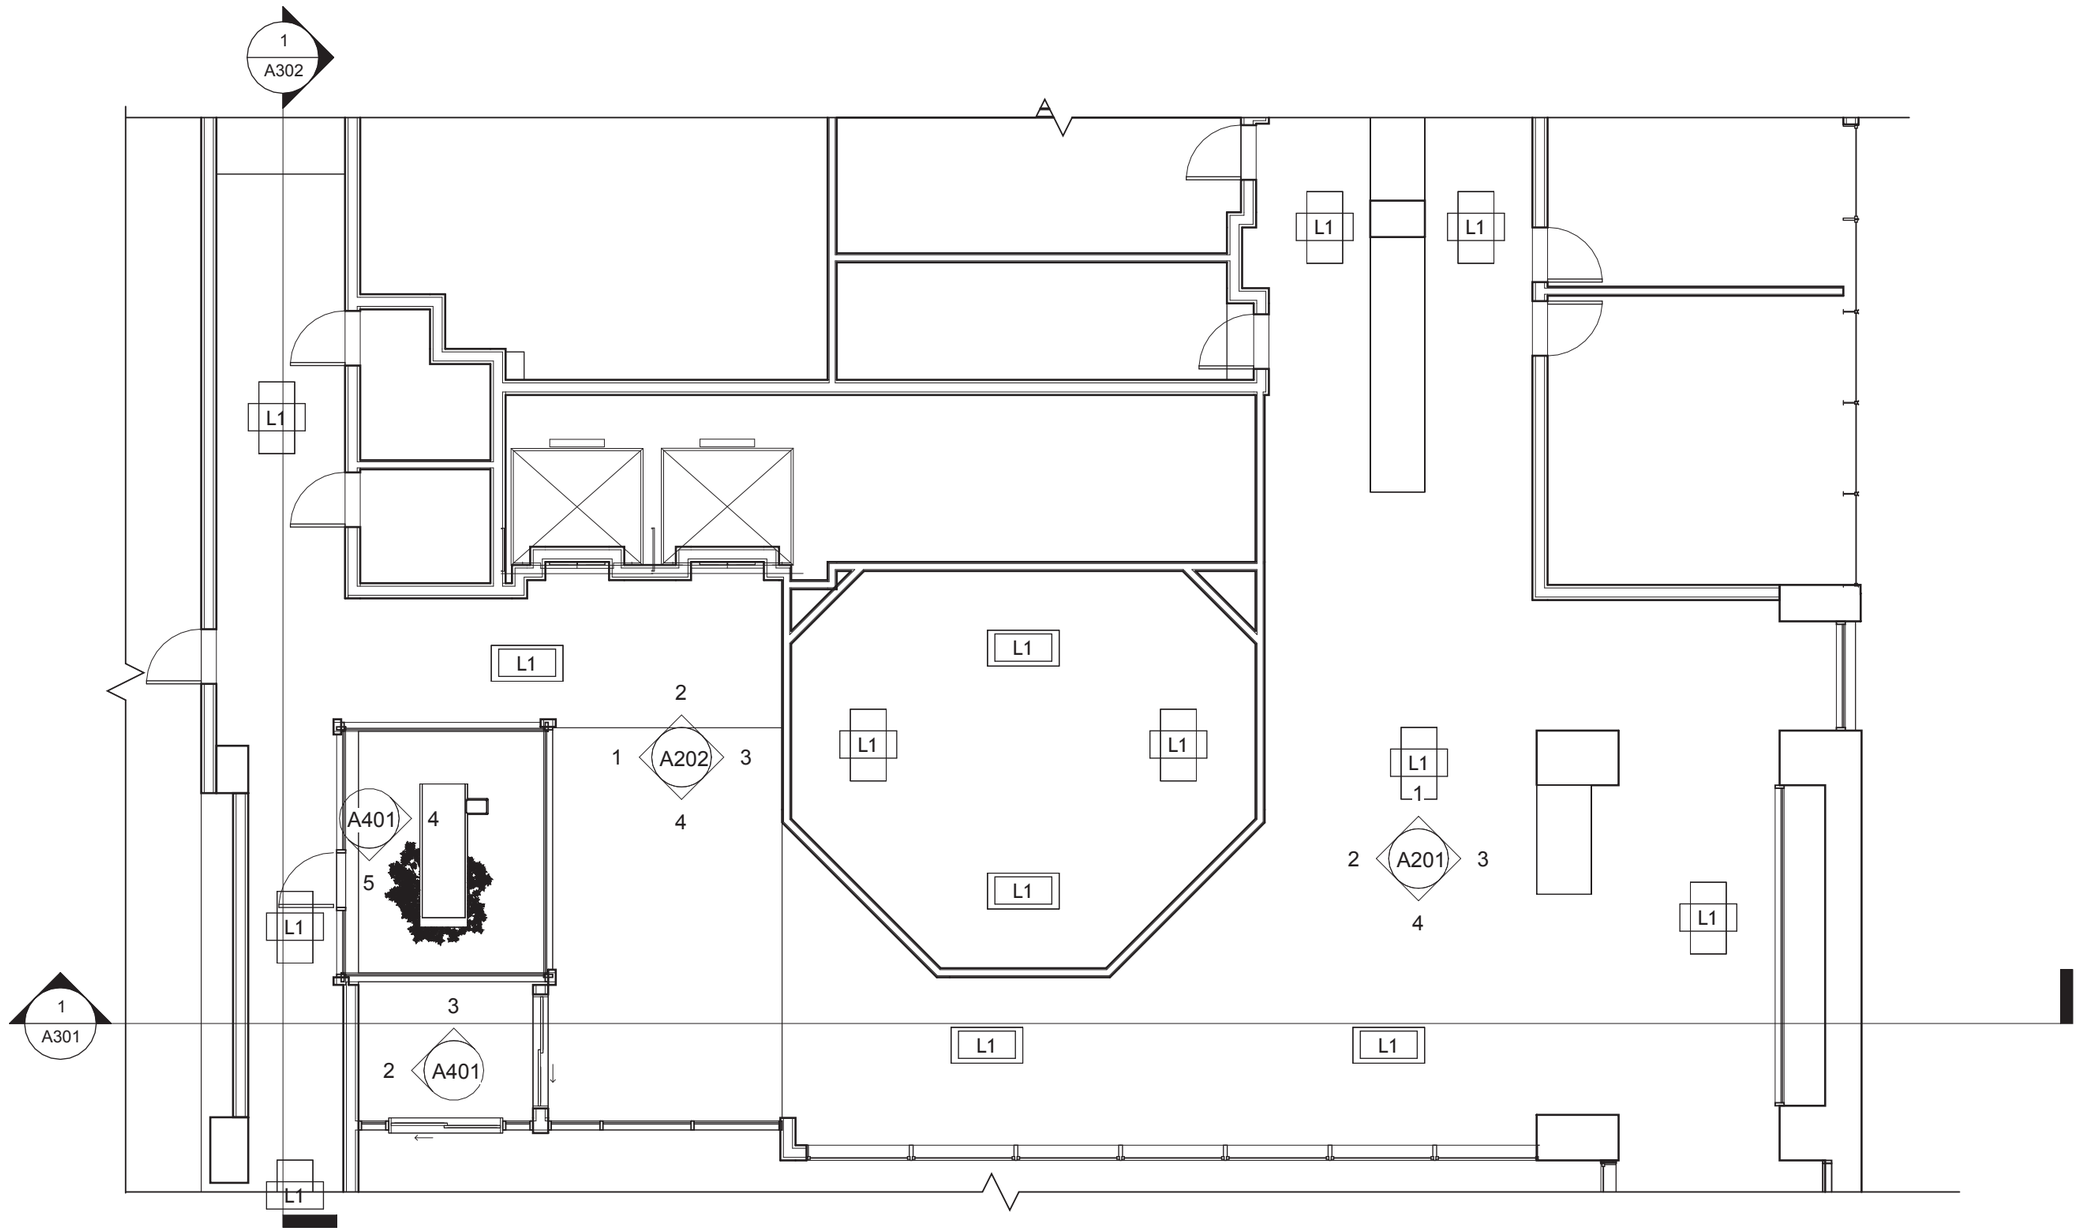

1 Ground Floor RCP

1/8" = 1'-0"

HEB-MVR SPATIAL UX DESIGN

CORNELL UNIVERSITY

DEA3301 / FALL 2026

No.	Description	Date

Level 1 RCP

Project number	DEA3301-P1
Date	30 SEP 2026
Drawn by	NX/YT
Checked by	Checker

A111

Scale 1/8" = 1'-0"

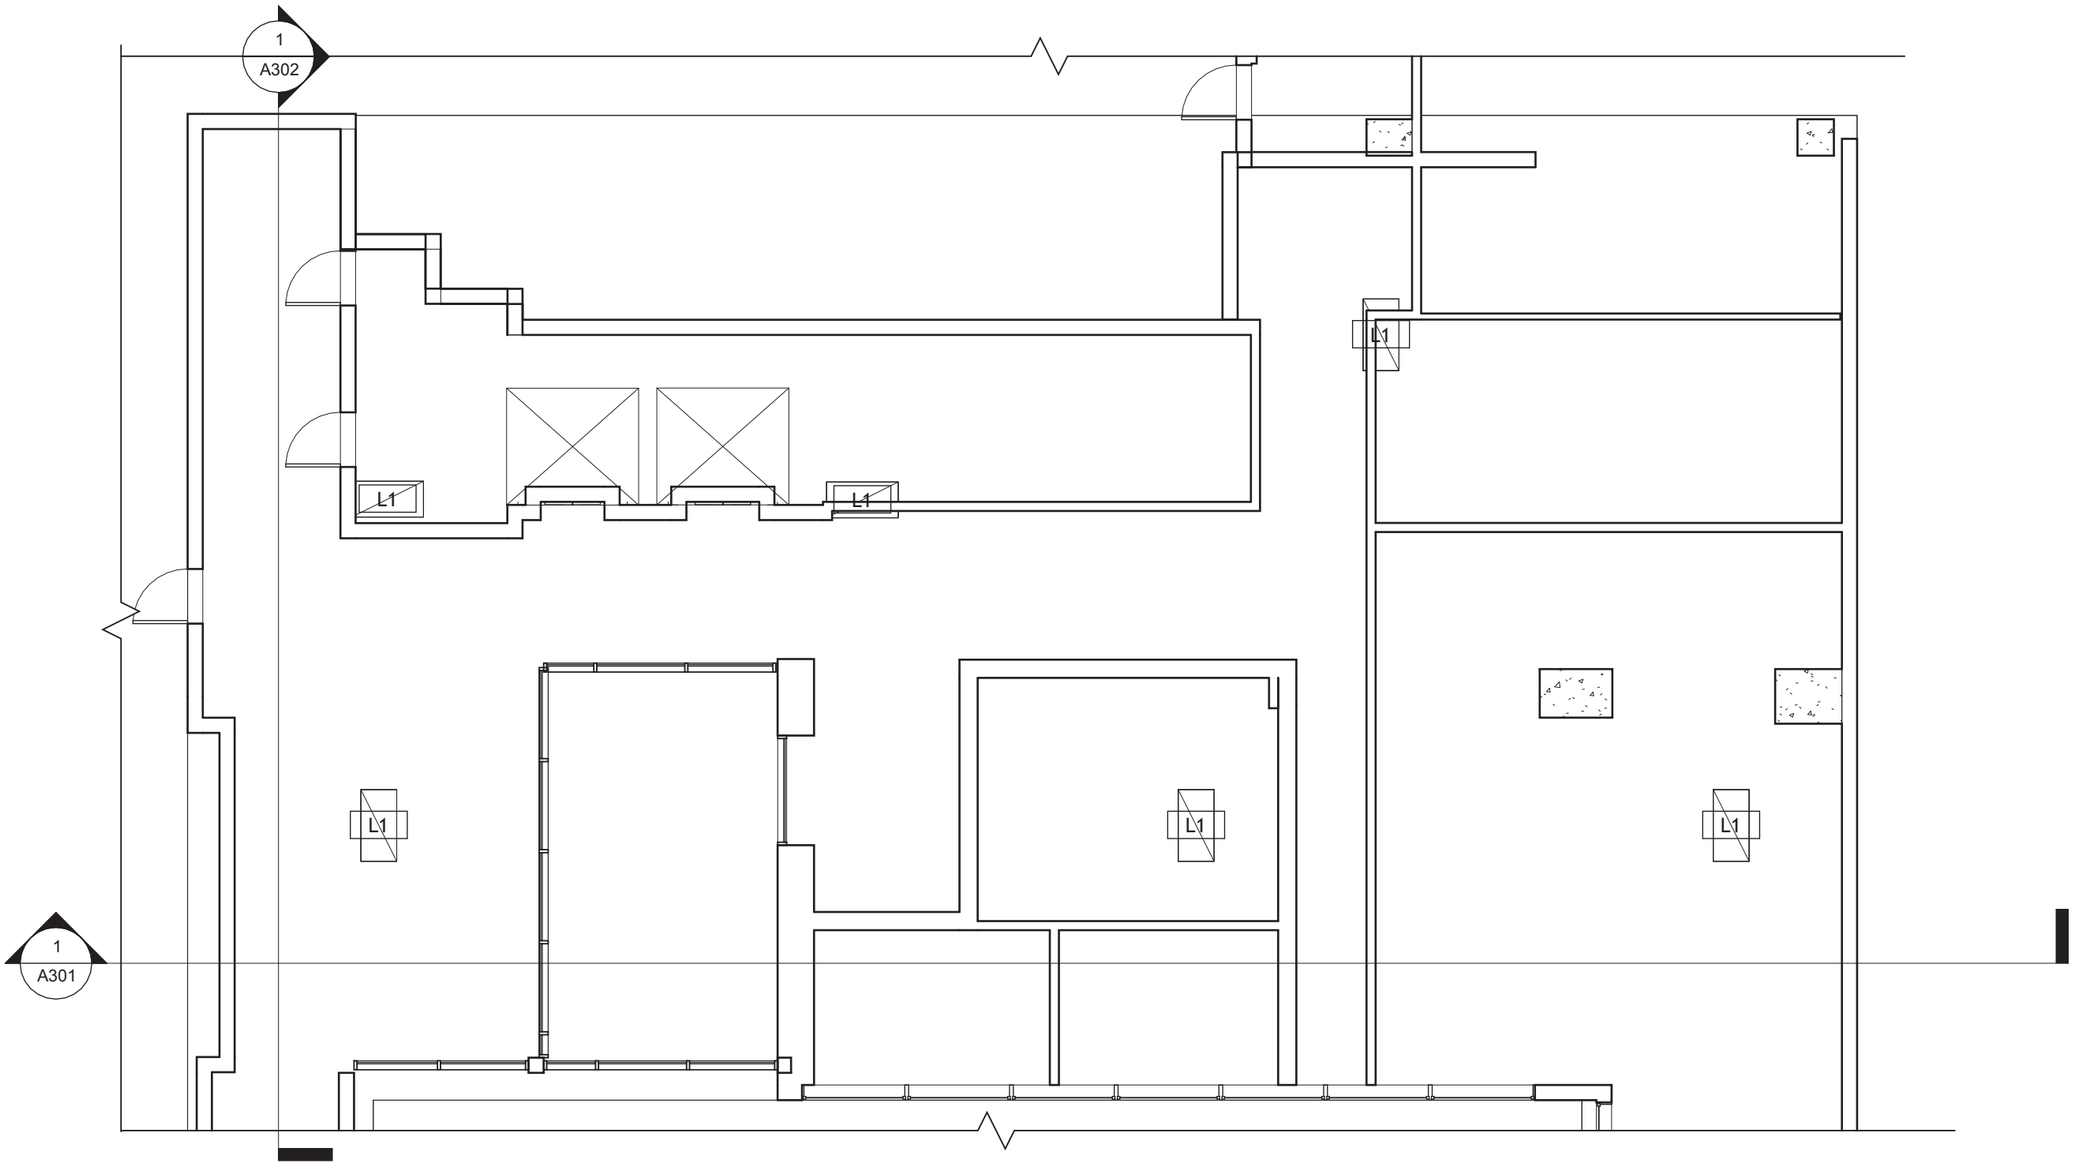

1 Level 2 RCP

1/8" = 1'-0"

HEB-MVR SPATIAL UX DESIGN

CORNELL UNIVERSITY

DEA3301 / FALL 2026

No.	Description	Date

Level 2 RCP

Project number	DEA3301-P1	A112
Date	30 SEP 2026	
Drawn by	NX/YT	
Checked by	Checker	Scale 1/8" = 1'-0"

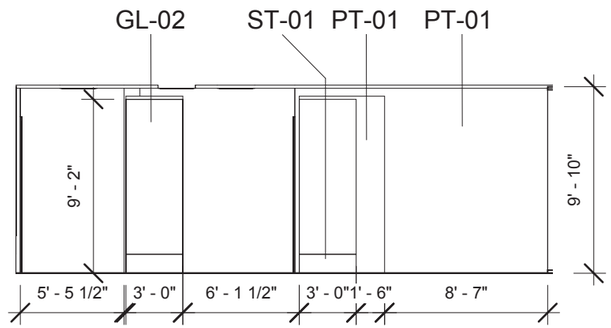

1 Elevation 1 East

1/8" = 1'-0"

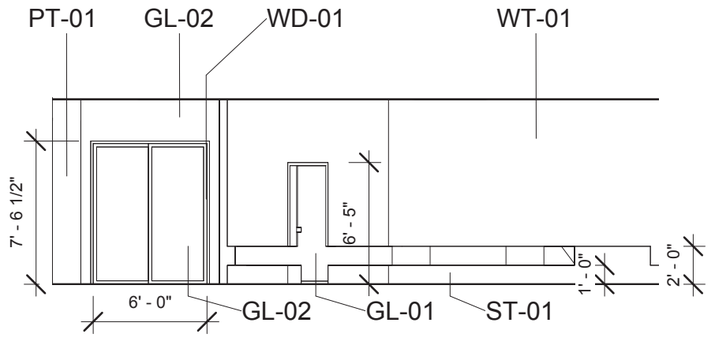

2 Elevation 1 North

1/8" = 1'-0"

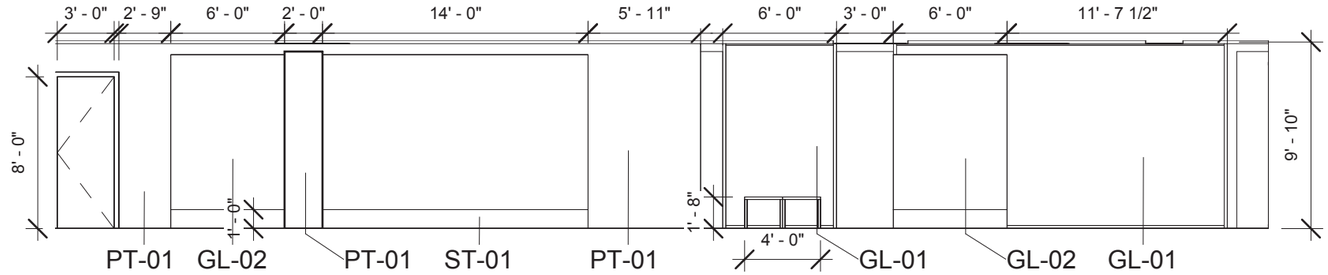

3 Elevation 1 South

1/8" = 1'-0"

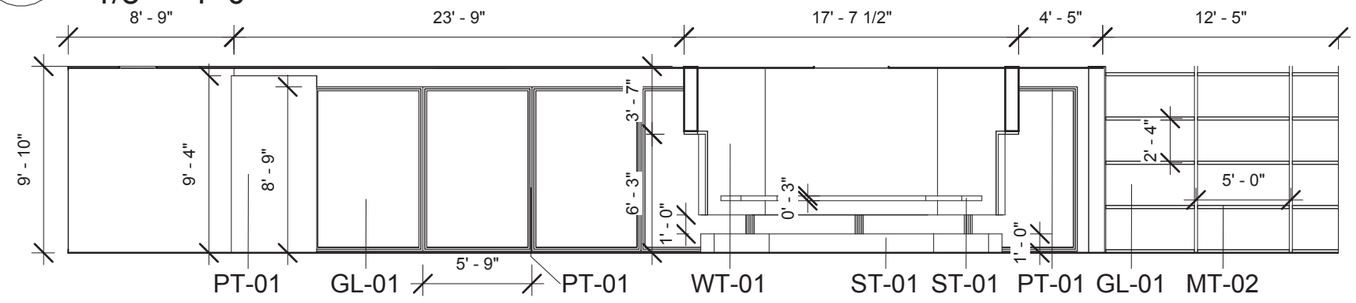

4 Elevation 1 West

1/8" = 1'-0"

HEB-MVR SPATIAL UX DESIGN

CORNELL UNIVERSITY

DEA3301 / FALL 2026

No.	Description	Date

Interior Elevation 1

Project number	DEA3301-P1	A201
Date	30 SEP 2026	
Drawn by	NX / YT	
Checked by	Checker	Scale 1/8" = 1'-0"

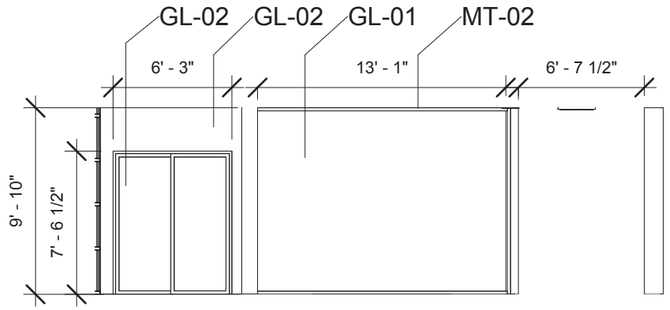

1 Elevation 2 North

1/8" = 1'-0"

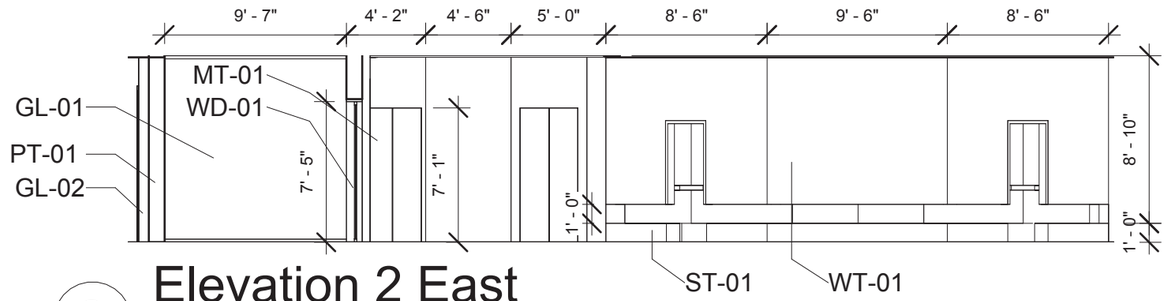

2 Elevation 2 East

1/8" = 1'-0"

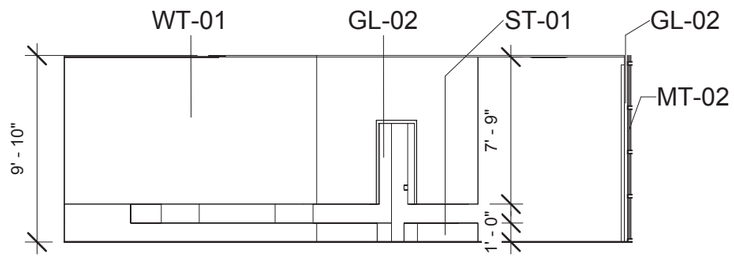

3 Elevation 2 South

1/8" = 1'-0"

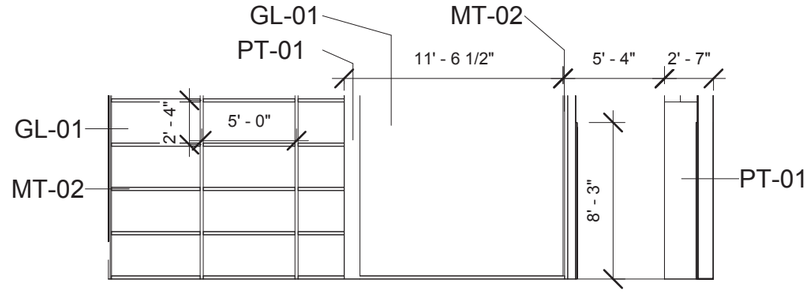

4 Elevation 2 West

1/8" = 1'-0"

HEB-MVR SPATIAL UX DESIGN

CORNELL UNIVERSITY

DEA3301 / FALL 2026

No.	Description	Date

Interior Elevation 2

Project number	DEA3301-P1
Date	30 SEP 2026
Drawn by	NX/YT
Checked by	Checker

A202

Scale 1/8" = 1'-0"

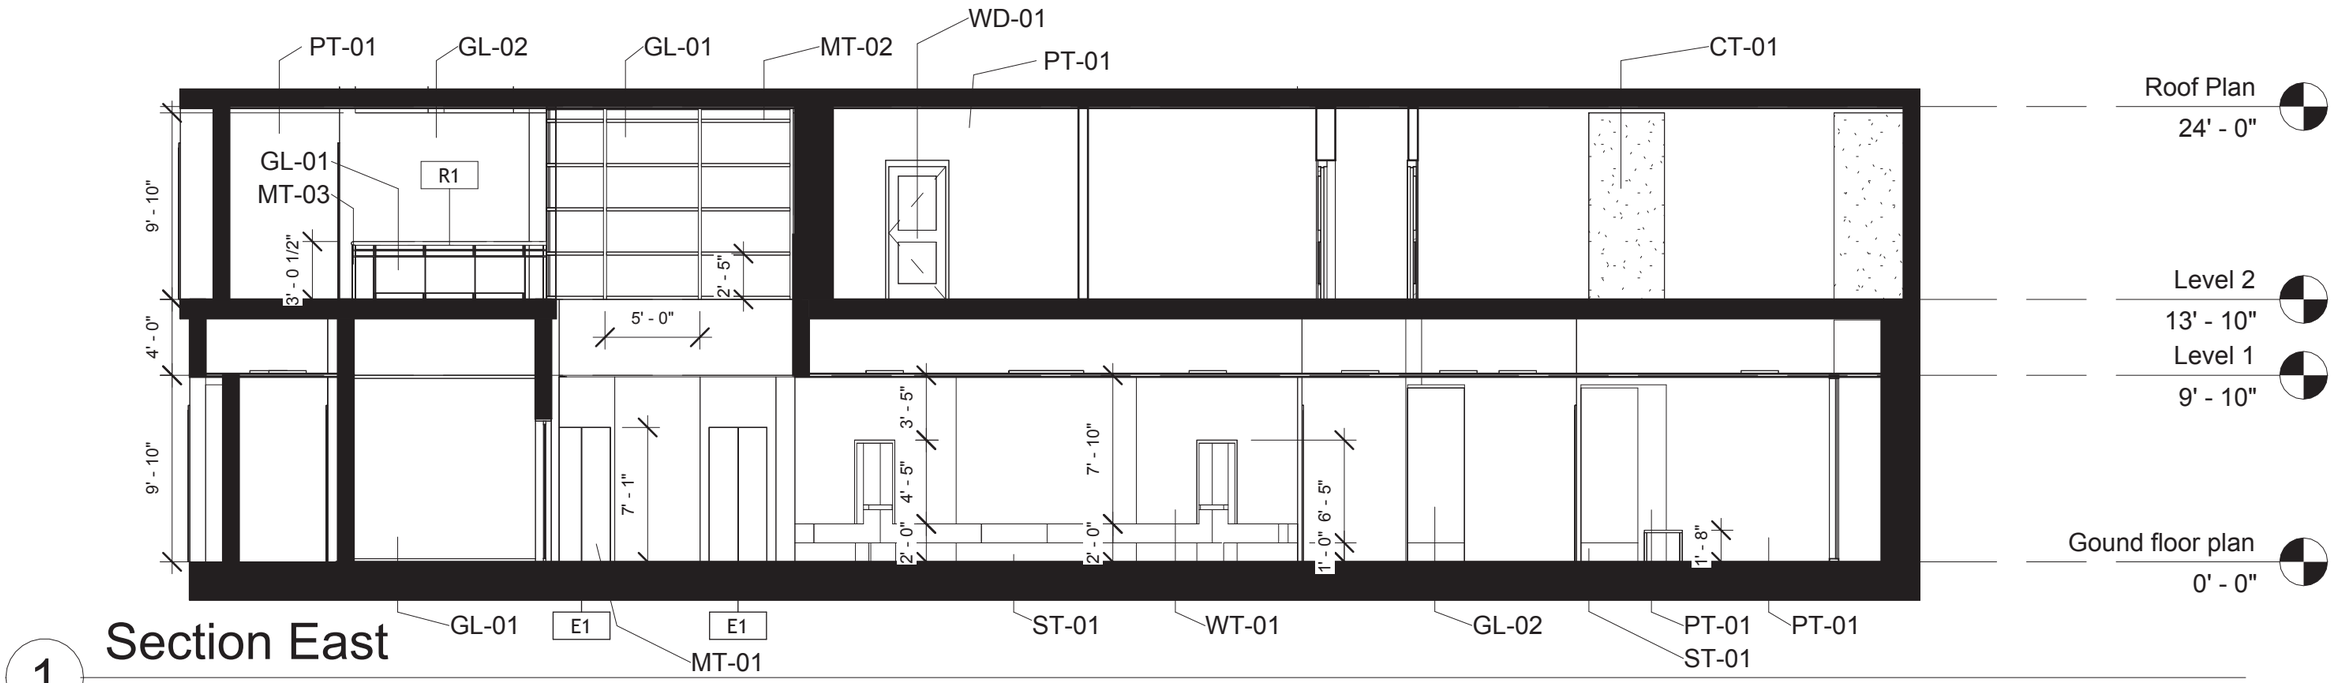

1 Section East

1/8" = 1'-0"

HEB-MVR SPATIAL UX DESIGN

CORNELL UNIVERSITY

DEA3301 / FALL 2026

No.	Description	Date

Building Section -- East

Project number	DEA3301-P1
Date	30 SEP 2026
Drawn by	NX/YT
Checked by	Checker

A301

Scale 1/8" = 1'-0"

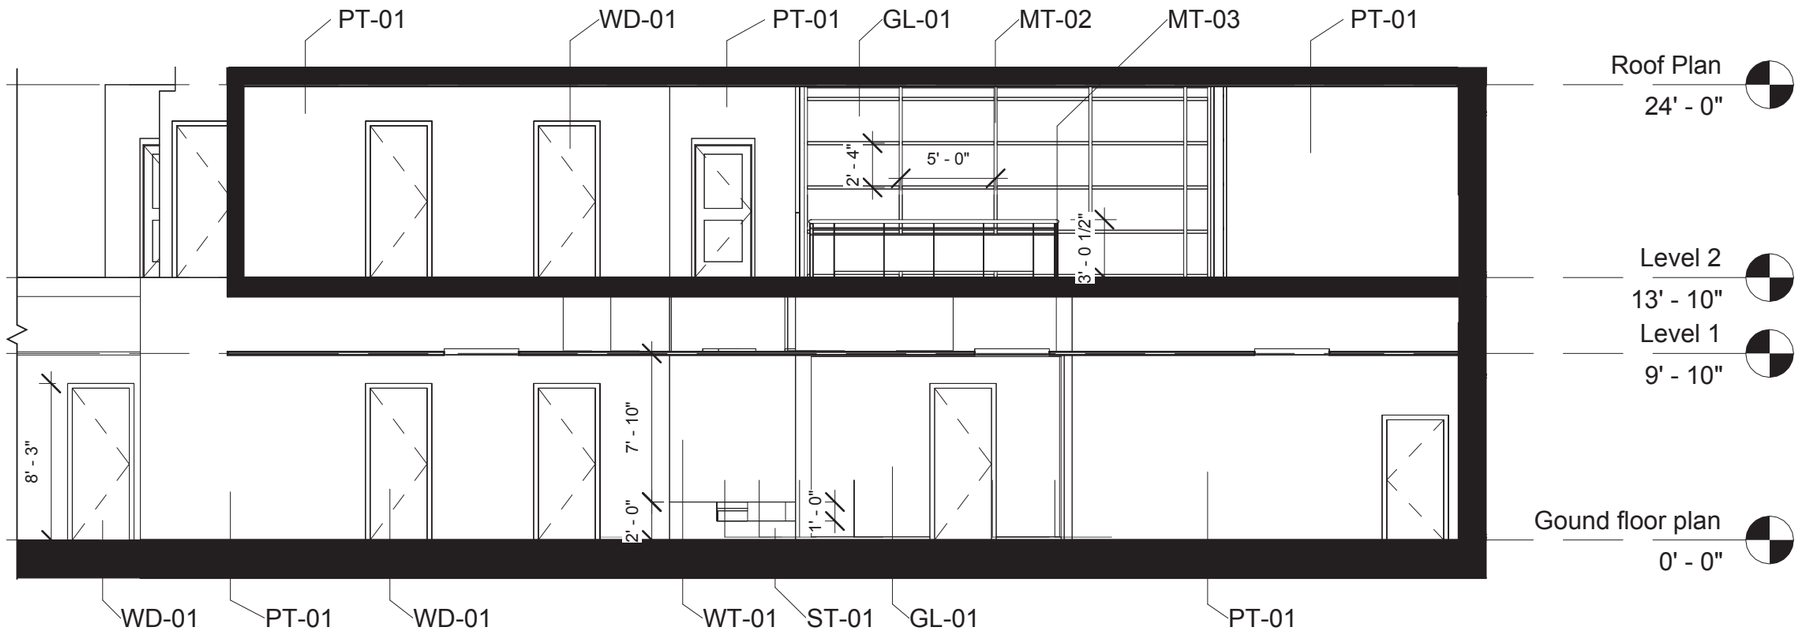

1 Section South

1/8" = 1'-0"

HEB-MVR SPATIAL UX DESIGN

CORNELL UNIVERSITY

DEA3301 / FALL 2026

No.	Description	Date

Building Section -- South

Project number	DEA3301-P1	A302
Date	30 SEP 2026	
Drawn by	NX/YT	
Checked by	Checker	Scale 1/8" = 1'-0"

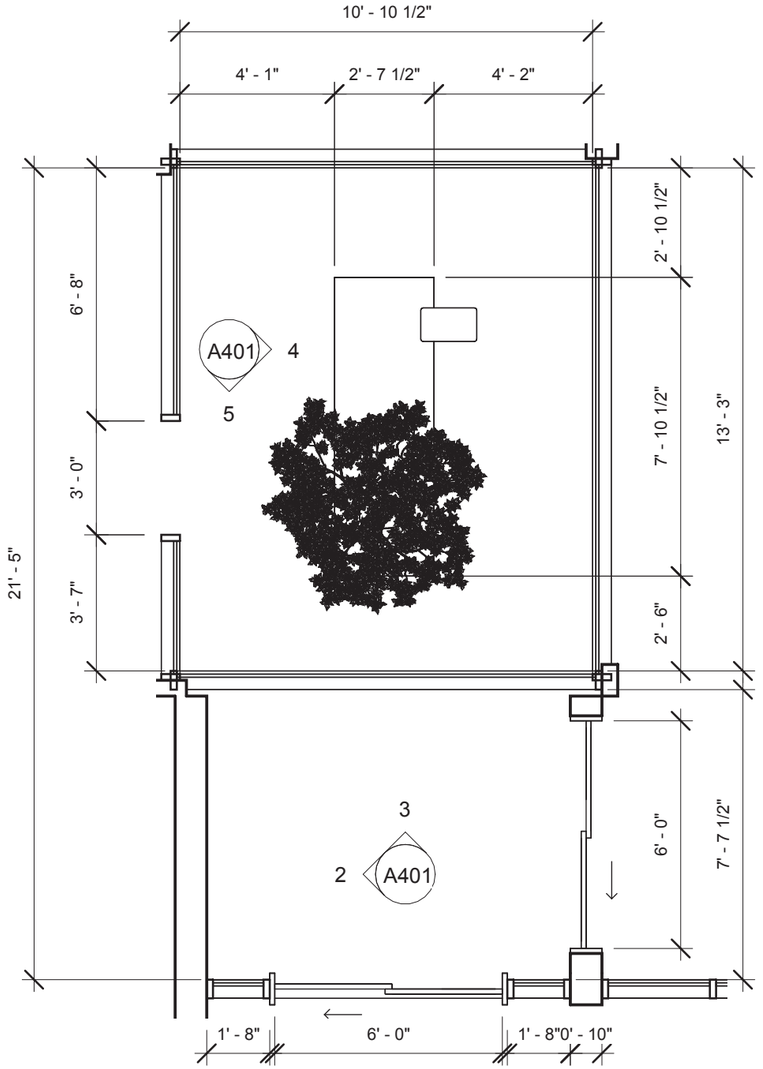

1 Gound floor plan - Callout 1

1/4" = 1'-0"

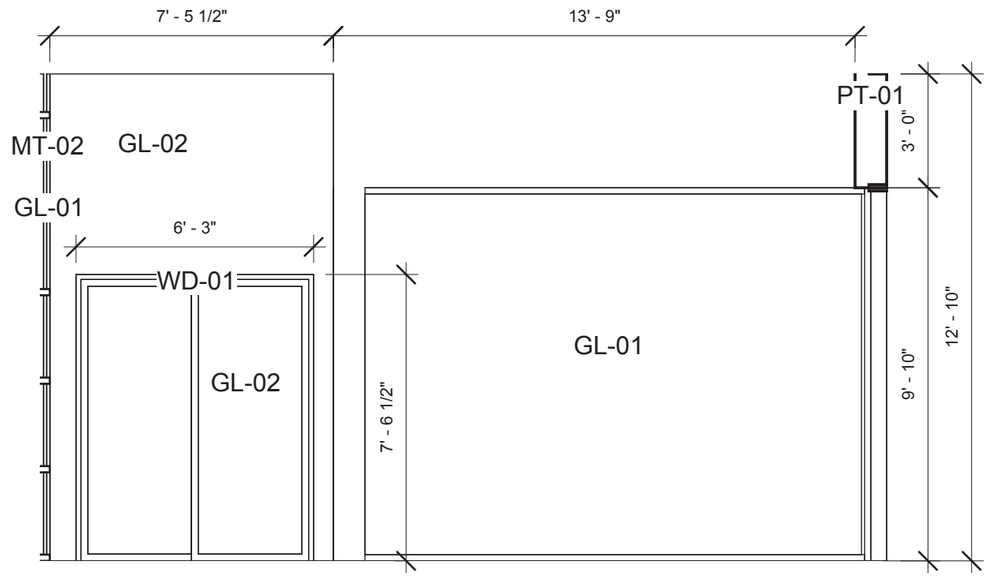

2 Callout North

1/4" = 1'-0"

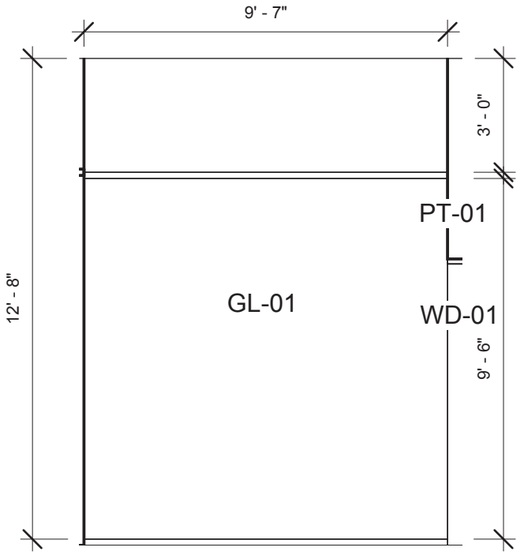

3 Callout East

1/4" = 1'-0"

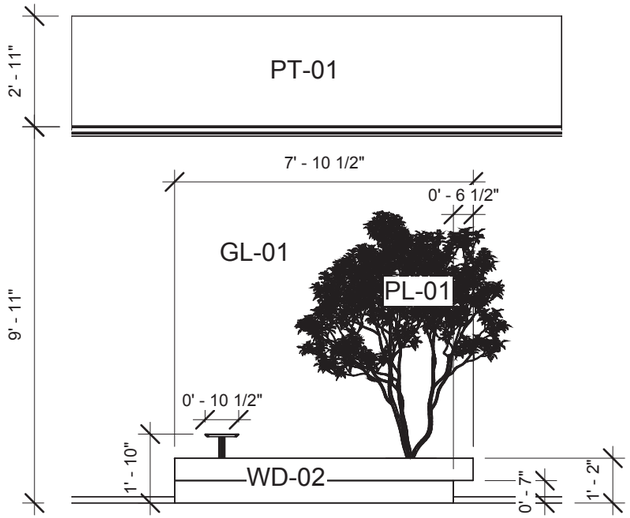

4 Callout South

1/4" = 1'-0"

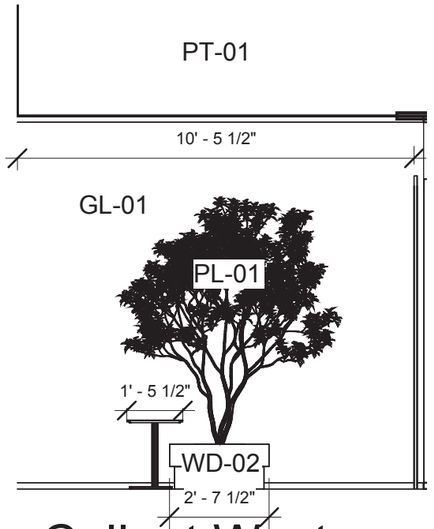

5 Callout West

1/4" = 1'-0"

HEB-MVR SPATIAL UX DESIGN

CORNELL UNIVERSITY

DEA3301 / FALL 2026

No.	Description	Date

Enlarged Plan + Interior Elevation

Project number	DEA3301-P1
Date	30 SEP 2026
Drawn by	NX/YT
Checked by	Checker

A401

Scale 1/4" = 1'-0"

TAG	IMAGE	ITEM / BASIS PRODUCT	DRAWING / PRODUCT SIZE	MATERIAL / FINISH	QTY / LOCATION	STATUS	CONSTRUCTION / INSTALL / MAINTAIN / VERIFY
F-01		**Integrated Tree Bench + Planter** Basis of Design: Metalco / HARRIS TREE Sectional Bench with Integrated Planter	Project drawing: approx. 2400 L × 800 D × 356 H mm ≈ 7'-10 1/2" L × 2'-7 1/2" D × 1'-2" H Standard HARRIS TREE: 1576 × 1519 × H420 mm	WPC (Wood Polymer Composite) perimeter frame and seating surface; integrated central tree / planter opening; concealed structural support as required. Warm natural wood-tone finish to coordinate with project palette.	Qty: 1 set Location: glazed atrium enclosure	CUSTOM / MODIFIED Metalco HARRIS TREE basis-of-design; drawing dimensions govern	Drawing dimensions govern. Product image is B.O.D. only. Coordinate rootball, liner, drainage, irrigation, removable access, anchorage, eased edges, and shop drawing review.
F-02		**Small Pedestal Museum Display Case / Column Showcase** Basis / Fabricator Reference: Relicase freestanding / pedestal case typology; Springfield Glass custom fabrication	Project proposed size: 300 W × 500 D × 1000 H mm ≈ 11.81 W × 19.69 D × 39.37 H in Approx. glass enclosure H: 750 mm ≈ 29.53 in Approx. base H: 450 mm ≈ 17.72 in	Low-iron tempered or laminated safety glass; dark charcoal powder-coated or painted pedestal; polished exposed glass edges; concealed access hardware.	Qty: 2 each Locations: gallery display corridor	CUSTOM FABRICATION Drawing dimensions govern	Use as a freestanding pedestal-style showcase. Provide stable weighted base, lockable access, concealed fasteners, optional dimmable LED, anti-tip anchorage, and clear viewing on all sides where possible. Final glass thickness, opening method, pedestal construction and environmental-control requirements to fabricator recommendation and shop drawings.
F-03		**Large Custom Museum Display Case / Table-Type Showcase** Basis / Fabricator Reference: Relicase museum display-case system; Springfield Glass custom museum display fabrication	Project proposed size: 1800 W × 650 D × 1250 H mm ≈ 70.87 W × 25.59 D × 49.21 H in Approx. glass enclosure H: 1000 mm ≈ 39.37 in Approx. base H: 200 mm ≈ 7.87 in	Low-iron clear safety glazing; metal or wood-composite base with dark charcoal / warm-black finish; minimal framing / edge hardware. Optional internal display deck to match gallery finish palette.	Qty: 1 each Location: gallery display corridor	CUSTOM FABRICATION Visual reference only	Relicase identifies tabletop, freestanding and conservation cases as standard museum fixture types and notes that museum cases may incorporate controlled environment, security and lighting features. Springfield Glass confirms custom museum display cases can be fabricated in different configurations and should provide clear multi-angle visibility and artifact protection. Final dimensions and glass make-up to Revit + fabricator shop drawings.
F-04		**Custom Pedestal Side Table** Basis of Design: Lesro / Willow Lounge Personal Table	Project drawing: 1'-5 1/2" W × 0'-10 1/2" D × 1'-10" H ≈ 445 W × 267 D × 559 H mm ≈ 17.52 W × 10.51 D × 22.01 H in	High-pressure laminate (HPL) top with knife-edge profile; powder-coated steel pedestal and base. Proposed dark brown / walnut-tone top with black steel base to coordinate with tree bench and gallery palette.	Qty: 3 each Locations: gallery display corridor beside windows and display case	CUSTOM / MODIFIED Drawing dimensions govern	Reference performance: approx. VLT 70%, SHGC 0.39 in standard 1 in IGU. Final heat treatment, safety glazing, spacer and U-value to existing system/code.
F-05		**Custom Hexagonal Display Plinth / Exhibition Table** Basis of Design: Artplinths / Hexagon Plinth,	Project custom size: approx. 2170 mm across flats × 2490 mm point-to-point × 600 mm H ≈ 85.43 × 98.03 × 23.62 in Standard reference product: 600 mm across opposing flat sides × 692 mm point-to-point × 1000 mm H ≈ 23.62 × 27.24 × 39.37 in	Medite® Premier MDF with mitred joints; reinforced internal framing. Custom sprayed or hand-painted finish; select non-metallic RAL color to match project palette. Recommend low-sheen / satin dark warm brown finish.	Qty: 1 each Location: center gallery display area	CUSTOM / MODIFIED Drawing dimensions govern	Use heavy-duty reinforced construction; standard heavy-duty option uses 18 mm panels and is rated nominally up to 100 kg distributed load. Provide concealed leveling, optional cable access / lockable access panel if AV or power is required. Final size, load and finish to shop drawing approval.

HEB-MVR SPATIAL UX DESIGN

CORNELL UNIVERSITY

DEA3301 / FALL 2026

No.	Description	Date

FF&E Schedule 1

Project number	DEA3301-P1	A601
Date	30 SEP 2026	
Drawn by	NX/YT	
Checked by	Checker	Scale

TAG	IMAGE	ITEM / BASIS PRODUCT	DRAWING / PRODUCT SIZE	MATERIAL / FINISH	QTY / LOCATION	STATUS	CONSTRUCTION / INSTALL / MAINTAIN / VERIFY
E-01		**Recessed LED Flat Panel** **Basis of Design: Lithonia Lighting / CPANL 2X4 40LM SWW7**	Nominal: 2'-0" × 4'-0" ceiling module \n≈ 610 × 1220 mm Final fixture dimensions to manufacturer data and existing T-grid field verification.	Low-profile white metal housing; diffuse white lens / flat luminous surface. Selectable CCT: 3500K / 4000K / 5000K. Recommend 4000K to match existing institutional lobby lighting.	Qty: Existing / field verify Location: suspended ceiling grid throughout circulation areas	EXISTING TO REMAIN / REPLACEMENT MATCH BASIS	Lay-in recessed installation in existing T-grid; integral grid clips. Coordinate power, 0–10V dimming, controls and emergency-lighting requirements. Match existing fixture spacing and ceiling module. Verify field conditions, exact voltage, lumen package and CCT before ordering. Clean lens with non-abrasive cloth; maintain driver access above ceiling.
L-01		**Existing Stainless-Steel Elevator Entrance Assembly** Elevator manufacturer / model: FIELD VERIFY Finish Basis: Rimex 304 Satin Stainless Steel	Existing entrance dimensions: FIELD VERIFY \nDoor opening, jamb, header and frame dimensions per existing elevator assembly	304 stainless steel, satin / brushed finish; natural silver-gray; uniform one-direction grain; low-to-moderate reflectivity	Qty:2 existing assembly Location: ground-floor lobby elevator entrance	EXISTING TO REMAIN / MATCH BASIS	Do not modify elevator doors, jambs, operators, controls or rated entrance assembly without elevator contractor coordination. Replacement / patch material must match existing stainless-steel grain direction, tone and reflectivity. Protect during construction. Clean only with non-abrasive stainless-steel cleaner in direction of grain.

HEB-MVR SPATIAL UX DESIGN

CORNELL UNIVERSITY

DEA3301 / FALL 2026

No.	Description	Date

FF&E Schedule 2

Project number	DEA3301-P1	A601
Date	30 SEP 2026	
Drawn by	NX/YT	
Checked by	Checker	Scale

TAG	SWATCH	APPLICATION / STATUS	ITEM / MATERIAL	COLOR / FINISH	PATTERN	SIZE / THICKNESS	BRAND / PRODUCT	CONSTRUCTION / INSTALL / MAINTAIN / VERIFY
WT-01		Gallery enclosure wall finish / panel facing.	DuPont™ Tyvek® 1073D paper-like HDPE sheet	Natural white; matte; paper-like hard structure; smooth surface.	Smooth sheet; horizontal panel joints / reveals per elevation (not printed pattern).	75.0 g/m² basis weight; 210–211 µm (8.3 mil) thick; opacity 96.5%.	DuPont™ Tyvek® 1073D	Adhere or mechanically mount to smooth rigid backing per fabricator. Coordinate seams with architectural reveals. Verify adhesive compatibility, fire-rating requirements, edge condition and full-scale mockup.
ST-01		Light-colored bench bases, plinths and integrated seating bases.	Reconstituted architectural stone	White Granite aggregate; sandblasted vertical faces; brushed horizontal seating surfaces.	Fine homogeneous aggregate.	Custom fabricated to drawings; thickness and edge profile per shop drawings.	Metalco PDM Reconstituted Stone / White Granite	Concrete + aggregates. Provide mockup; verify anchors, substrate and edge profiles. Protective revitalizing treatment; anti-graffiti coating optional.
PT-01		General walls, columns and soffit faces.	High-performance interior wall paint	Benjamin Moore White OC-151; matte; LRV 83.56.	Continuous uniform coating.	1–2 coats; coverage 400–450 sf/gal; recoat 2–3 hr.	Benjamin Moore Scuff-X Matte N484 / OC-151	High-traffic, low-VOC, scuff-resistant coating. Prepare clean/dry substrate; prime as required; soap-and-water cleanup; retain touch-up stock.
PT-02		Main ceilings, dropped ceilings and soffit undersides.	Ultra-flat ceiling paint	Ceiling White 09; ultra-flat.	Continuous smooth finish.	Dry film 1.3–1.5 mil/coat; 1–2 coats; 400–450 sf/gal.	Benjamin Moore Waterborne Ceiling Paint N508	Premium low-VOC ceiling coating. Use smooth prepared ceiling substrate; Level 4/5 finish where grazing light is critical. Recoat 1–2 hr.
WD-01		Dark gallery bench tops, ledges and integrated display surfaces.	Walnut high-pressure laminate	Formal Walnut 5782; Natural Grain (NG); low-luster, vertical woodgrain.	Classic brown-stained walnut; random-match visual.	Grade 10 HGS: 0.044 in / 1.1 mm; laminate over MDF/plywood substrate.	Formica 5782 Formal Walnut / Natural Grain.	General-purpose HPL for horizontal/vertical interiors. Bond to stable substrate; balance opposite face as required. Non-abrasive cleaning; conceal/coordinate exposed edges.
WD-02		Tree bench / planter bench finish reference.	Natural hardwood finish	Natural-to-honey brown hardwood; water-based pigmented impregnation; low sheen.	Natural linear / random wood grain.	H TREE assembly 1576 x 1519 mm; H 420 mm.	Metalco HARRIS ISOLA TREE	Carry product itself in FF&E schedule. Pre-drilled for anchors. Final wood tone, steel support finish and maintenance regime to approved physical sample.

HEB-MVR SPATIAL UX DESIGN

CORNELL UNIVERSITY

DEA3301 / FALL 2026

No.	Description	Date

Material & Finish Schedule 1

Project number	DEA3301-P1	A602
Date	30 SEP 2026	
Drawn by	NX/YT	
Checked by	Checker	Scale

10/7/2026 2:15:29 AM

TAG	SWATCH	APPLICATION / STATUS	ITEM / MATERIAL	COLOR / FINISH	PATTERN	SIZE / THICKNESS	BRAND / PRODUCT	CONSTRUCTION / INSTALL / MAINTAIN / VERIFY
CT-01		Exposed structural concrete walls, columns, slab edges and architectural concrete surfaces where indicated.	Exposed cast-in-place architectural concrete	Natural concrete gray; smooth formed finish; matte / uncoated appearance. Minor natural tonal and aggregate variation acceptable	Smooth formwork finish; uniform surface with subtle natural mottling. No applied decorative pattern.	Structural thickness per drawings / structural engineer. Concrete strength and reinforcement per structural design.	Holcim ECOPact Low-Carbon Concrete	Use consistent concrete source / mix for color uniformity. Provide smooth, clean formwork; minimize bugholes, fins and discoloration. Use compatible form-release agent such as Sika® Form Release 8000 where required; Sika states it can produce a smooth, unstained architectural concrete surface.
MT-01		Elevator doors and surrounds; replacement / patch match only.	Satin stainless-steel architectural finish	Natural stainless steel; one-direction satin polish; vertical grain.	Fine directional brushed grain.	12 x 24 in nominal; 3/8 in floor-tile thickness.	Rimex 304 Grade Satin Polish (visual basis)	Do not modify elevator assembly without manufacturer coordination. Match existing appearance; clean along grain with non-abrasive stainless cleaner.
MT-02		Existing glazed façade mullions; replacement / match basis only.	Exterior aluminum curtain-wall framing	#14 Clear Anodized; Architectural Class I.	Uniform satin anodized aluminum.	Reference sightline 2-1/2 in; final existing system depth to field verify.	Kawneer 1600 Wall System 1 / #14 Clear Anodized	Existing assembly retained. Field-verify actual profile, depth, glazing and anchors before any replacement work.
MT-03		Minimal perimeter / head / sill channels for new interior glass partitions.	Satin anodized aluminum glass U-channel / trim	Satin anodized aluminum; light silver.	Continuous minimal profile; recess where feasible.	CRL UCSA3812SL: 1-5/8 x 1-5/8 in; 120 in length; for 3/8 in glass.	CRL Regular U-Channel UCSA3812SL	Top-load roll-in glazing gasket; surface- or recess-mounted. Coordinate with GL-02, setting blocks, anchors and head deflection. Final profile by glazing fabricator.
GL-01		Existing exterior curtain-wall vision glazing; replacement basis only.	Exterior solar-control low-E insulating glass	Clear, color-neutral, low reflectivity.	Transparent IGU.	Standard reference: 1 in IGU; final existing make-up to field verify.	Vitro Solarban 60 on Clear + Clear	Reference performance: approx. VLT 70%, SHGC 0.39 in standard 1 in IGU. Final heat treatment, safety glazing, spacer and U-value to existing system/code.
GL-02		New full-height interior gallery / atrium glass partitions.	Low-iron tempered interior glazing	Ultra-clear / low-iron; color-neutral.	Transparent monolithic glazing.	3/8 in (10 mm) proposed; final thickness by panel size, engineering and code.	Guardian CrystalClear low-iron glass (basis)	Temper or laminate as required; polished exposed edges; verify maximum panel size, deflection and safety-glazing requirements.
PL-01		Tree-bench enclosure within atrium.	Interior specimen tree / planting	Dark evergreen foliage; natural brown branching trunk.	Multi-stem broadleaf specimen.	Final installed height and canopy by planting consultant.	Ficus-type interior specimen tree; final species TBD.	Not a finish material. Coordinate planter opening, rootball, irrigation/drainage, grow-light/daylight availability, maintenance access and final species selection.

HEB-MVR SPATIAL UX DESIGN

CORNELL UNIVERSITY

DEA3301 / FALL 2026

No.	Description	Date

Material & Finish Schedule 2

Project number	DEA3301-P1	A602
Date	30 SEP 2026	
Drawn by	NX/YT	
Checked by	Checker	Scale

Gallery
Corridor

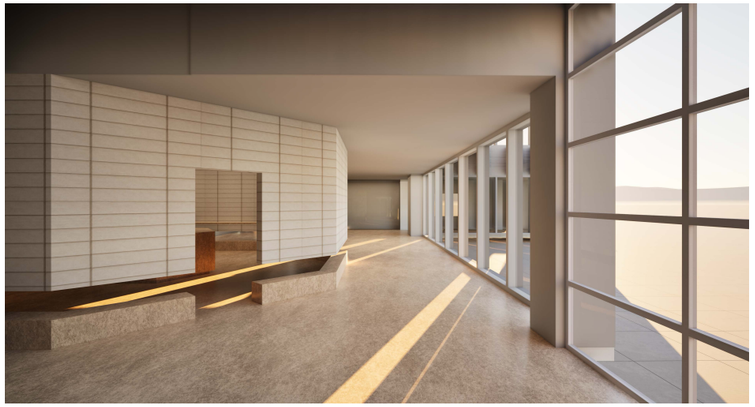

Atrium Tree
Landmark

Central
Commons
View

Gallery
Exterior
Edge

Tree
Seating
Enclosure

Flexible
Display
Area

HEB-MVR SPATIAL UX DESIGN

CORNELL UNIVERSITY

DEA3301 / FALL 2026

No.	Description	Date

Perspective Renderings

Project number	DEA3301-P1	A901
Date	30 SEP 2026	
Drawn by	NX/YT	
Checked by	Checker	Scale